



Corrosion Protection for Increased Resiliency of NASA's Launch and Ground Support Equipment

**2015 International Workshop on Environment and Alternative Energy
European Space Agency (ESA)
European Space Astronomy Centre (ESAC) Madrid, Spain
November 10-13, 2015**

Luz Marina Calle, Ph.D.
NASA's Corrosion Technology Laboratory
Kennedy Space Center, FL, 32899, USA



Outline

- Introduction
- Corrosion
 - Corrosion protection for increased resiliency of NASA's launch and ground support equipment timeline
 - Corrosion grand challenges
 - Natural and Launch environments at KSC
 - Qualifying coatings for NASA's launch facilities
 - NASA's Corrosion Technology Laboratory Website
- Corrosion evaluation
 - Atmospheric exposure testing
 - Accelerated tests
 - Electrochemical measurements
 - Surface analysis
- Corrosion Engineering Projects
 - Environmentally driven projects
 - Environmentally friendly corrosion protective compounds (CPCs)
- Technology Development
 - Smart coatings
 - New accelerated corrosion test method



Introduction

- NASA has been dealing with corrosion since the inception of the Space Program in 1962 because it launches from the most naturally corrosive environment in North America.
- The beachside atmospheric exposure test site was established in 1966 to test materials, coatings, and maintenance procedures near the launch pads.
- In 1981, corrosion conditions at the launch pads became even more severe due to solid rocket booster (SRB) exhaust products from the Space Shuttle.
- In 1985, accelerated corrosion testing began (salt fog and electrochemical).
- In 2000, The Corrosion Technology Laboratory was created to achieve KSC's goal of increased participation in research and development.
- In 2000 a computerized corrosion data management system was implemented.
- In 2001, NASA Technical Standard NASA-STD-5008 for Protective Coatings of Carbon Steel, Stainless Steel, and Aluminum on Launch Structures, Facilities, and Ground Support Equipment was approved.
- In 2004, the corrosion technology laboratory started developing smart coatings, based on microencapsulation technology, specifically designed for corrosion control applications (U.S. Patents Nos. 7,790,225, 2010; 8,859, 288, 2014; 9,108,174, 2015 and several pending).




Introduction

- In 2011, NASA-STD-5008B revision updated the standard and added a paragraph on environmental stewardship:
 - a. Environmental, health, and safety impacts of processes and materials shall be taken into account when employing protective coating methods and techniques.
 - b. Alternative, environmentally friendly materials that do not contain hexavalent chromium, lead, cadmium, or hazardous air pollutants (HAPs), such as methyl ethyl ketone, toluene, and xylene, shall be considered when determining the correct coating method/technique for each protective coating application.
- In 2014, NASA's Space Technology Roadmap included corrosion control technologies as one of the areas needed to lower the cost and improve the sustainability and efficiency of its ground operations in support of future launch activities.
- This presentation provides a chronological overview of corrosion protection for increased resiliency of NASA's launch and ground support equipment throughout the history of NASA's Space Program.



Corrosion Protection for Increased Resiliency of NASA's Launch and Ground Support Equipment Timeline

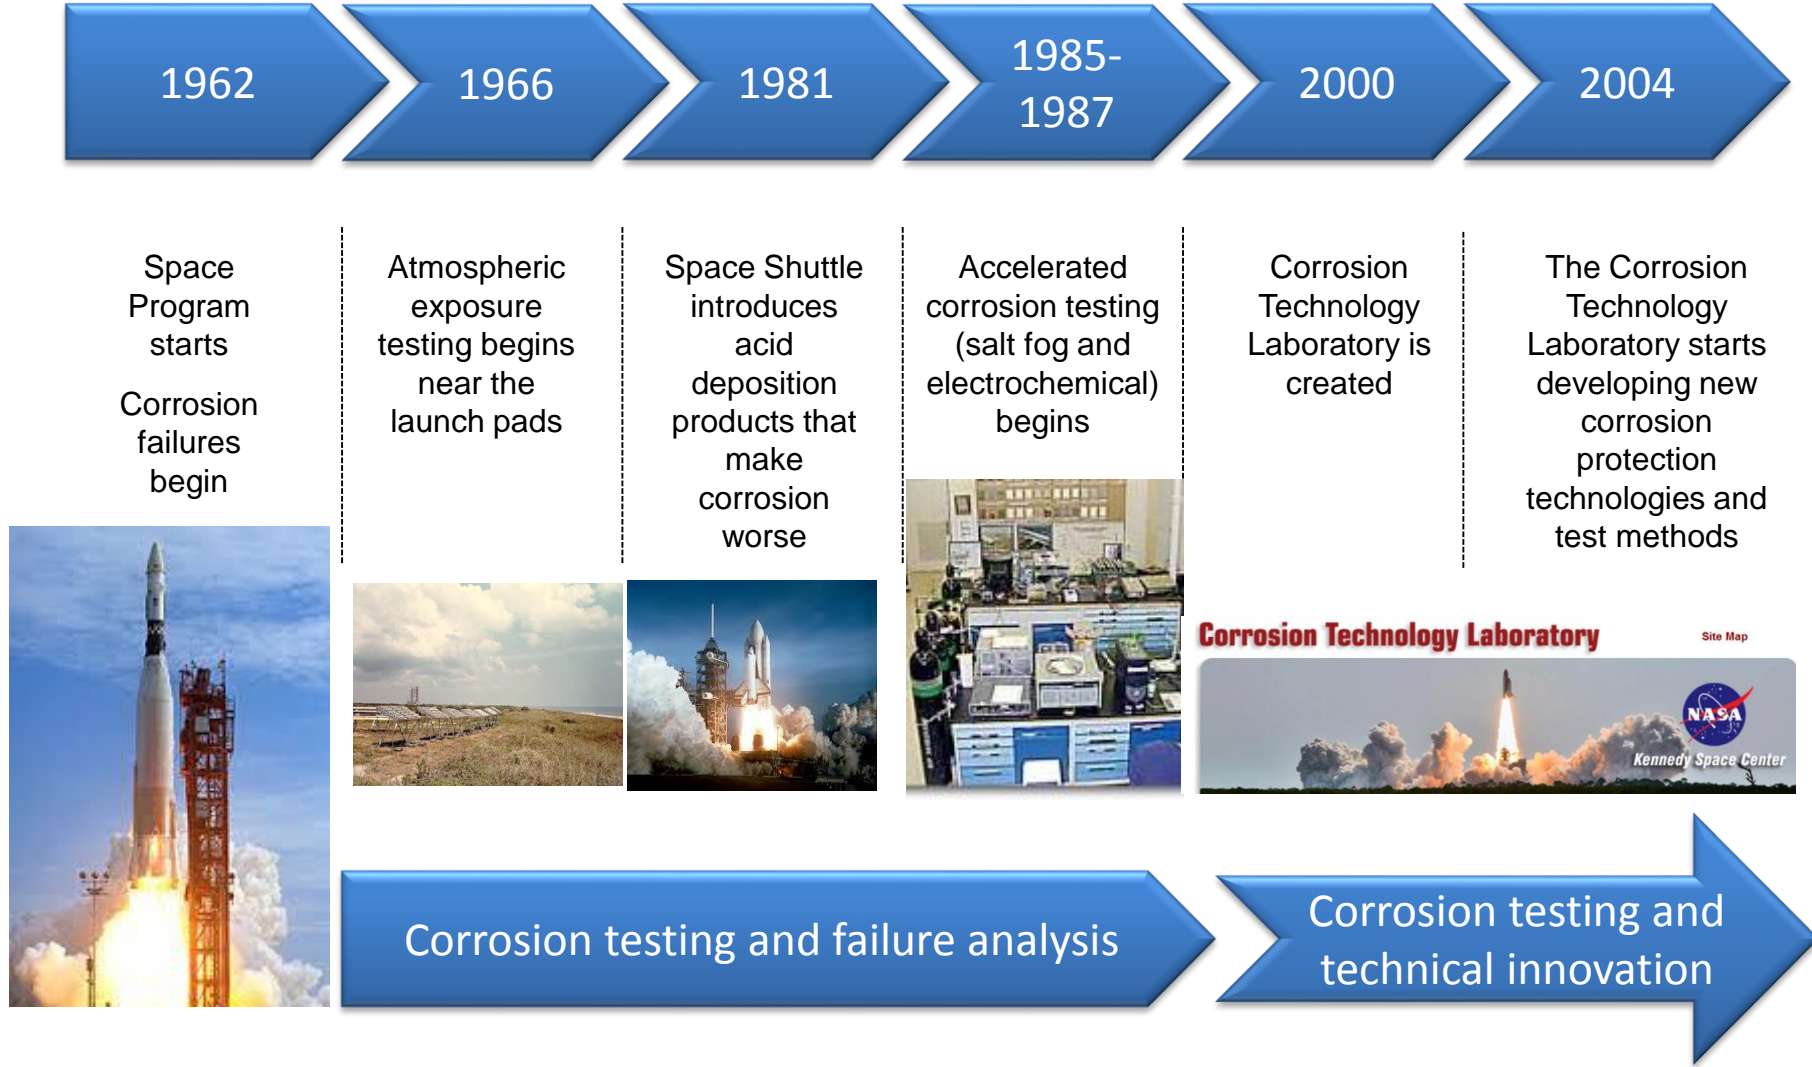

NASA Space Technology Roadmap

America is beginning an exciting new chapter in space exploration. To enable the future, NASA has developed a set of roadmaps to define the key new technologies required for our human and robotic explorers to safely venture into deep space, to better understand how our own solar system evolved, and to unravel the mysteries of our universe.


The map you see here is a graphical representation of the NASA Space Technology Roadmaps, serving as a portal to the various technologies that NASA is developing. Let this technology portal serve as a starting point for your adventures beyond the bounds of Earth...

To learn more visit
www.nasa.gov/oct




Corrosion Grand Challenges*

- Development of cost-effective, environment-friendly, corrosion-resistant materials and coatings.
- High-fidelity modeling for the prediction of corrosion degradation in actual service environments.
- Accelerated corrosion testing under controlled laboratory conditions. Such testing would quantitatively correlate with the long-term behavior observed in service environments.
- Accurate forecasting of remaining service time until major repair, replacement, or overhaul becomes necessary. i.e., corrosion prognosis.

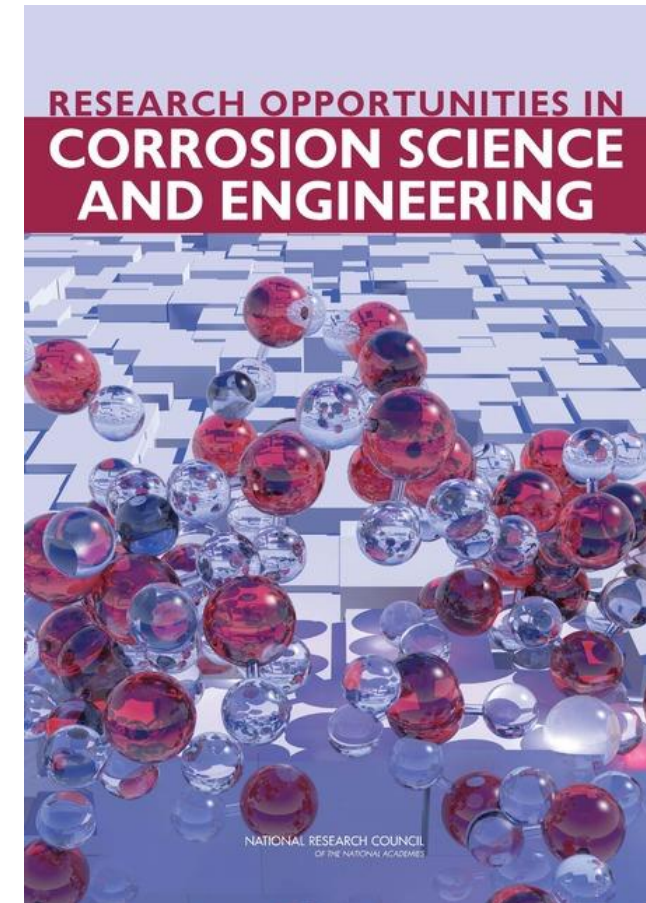

***Research Opportunities in Corrosion Science and Engineering**, Committee on Research Opportunities in Corrosion Science and Engineering; National Research Council (2010)

Where Are We?

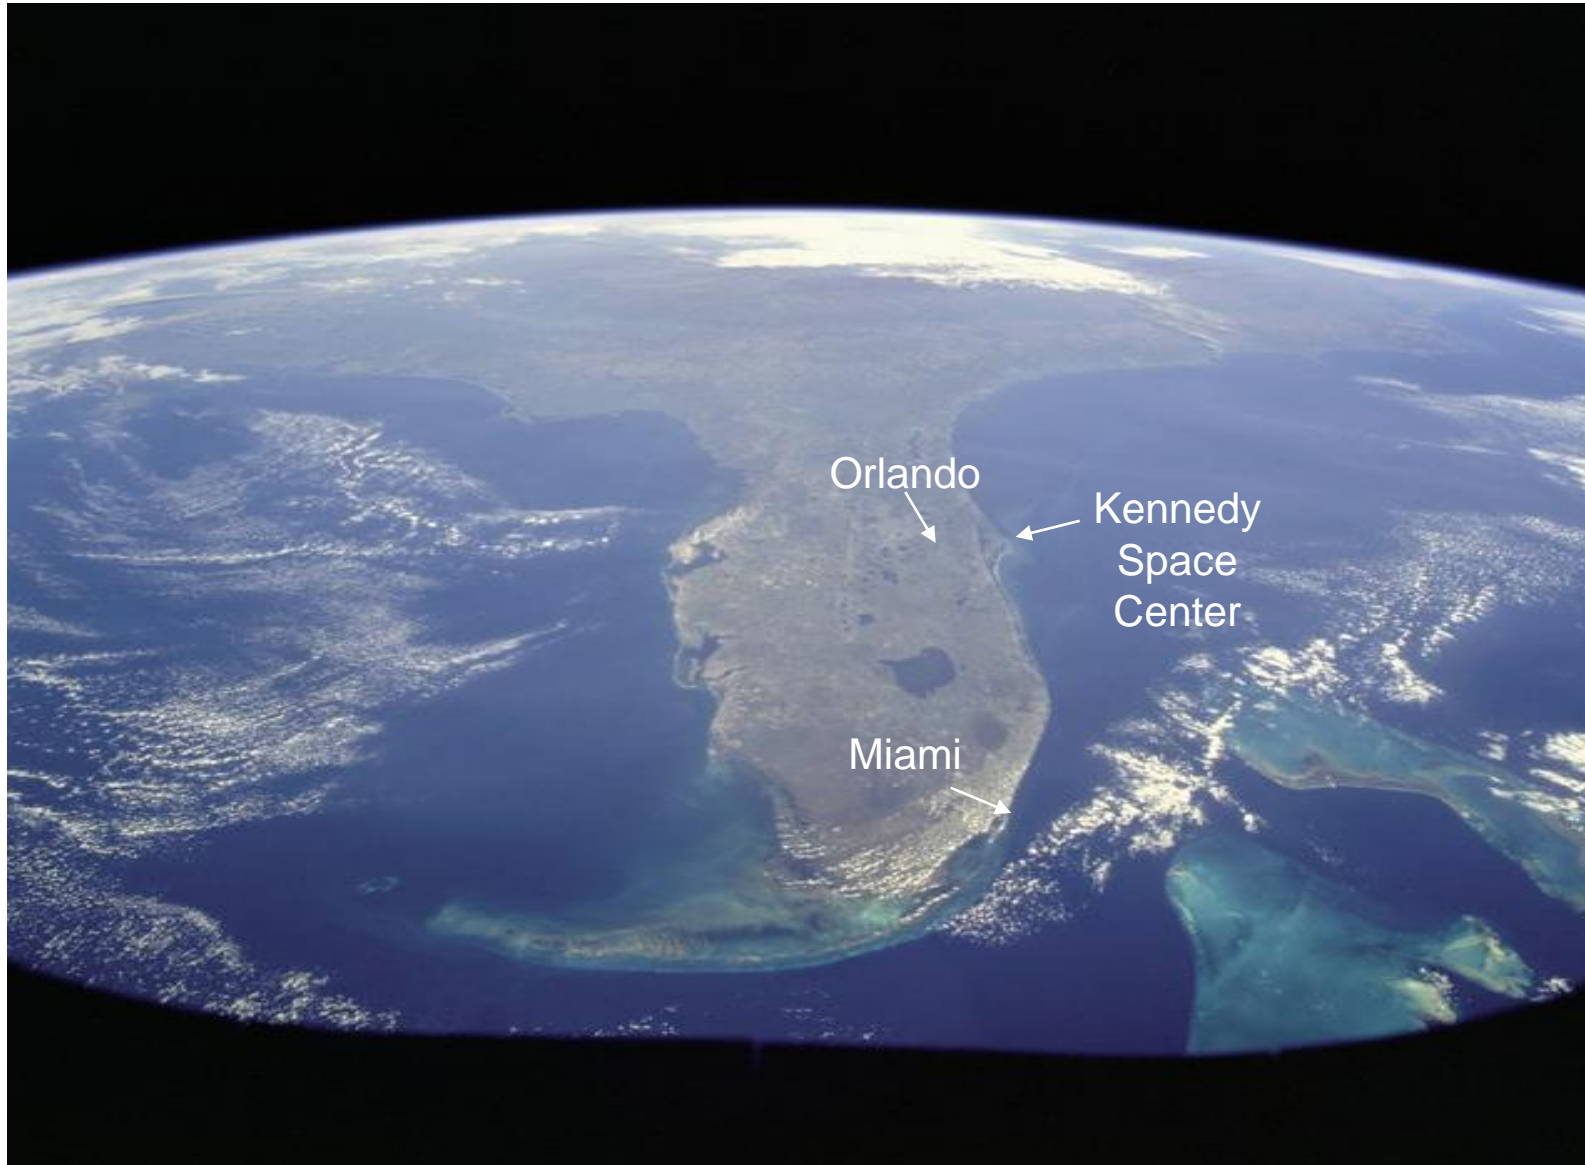


**The Kennedy Space Center in Florida,
USA, is a special place where we launch
rockets from a wild life refuge in one of the
most corrosive areas in the world**



KSC Natural Environment




KSC Launch Environment

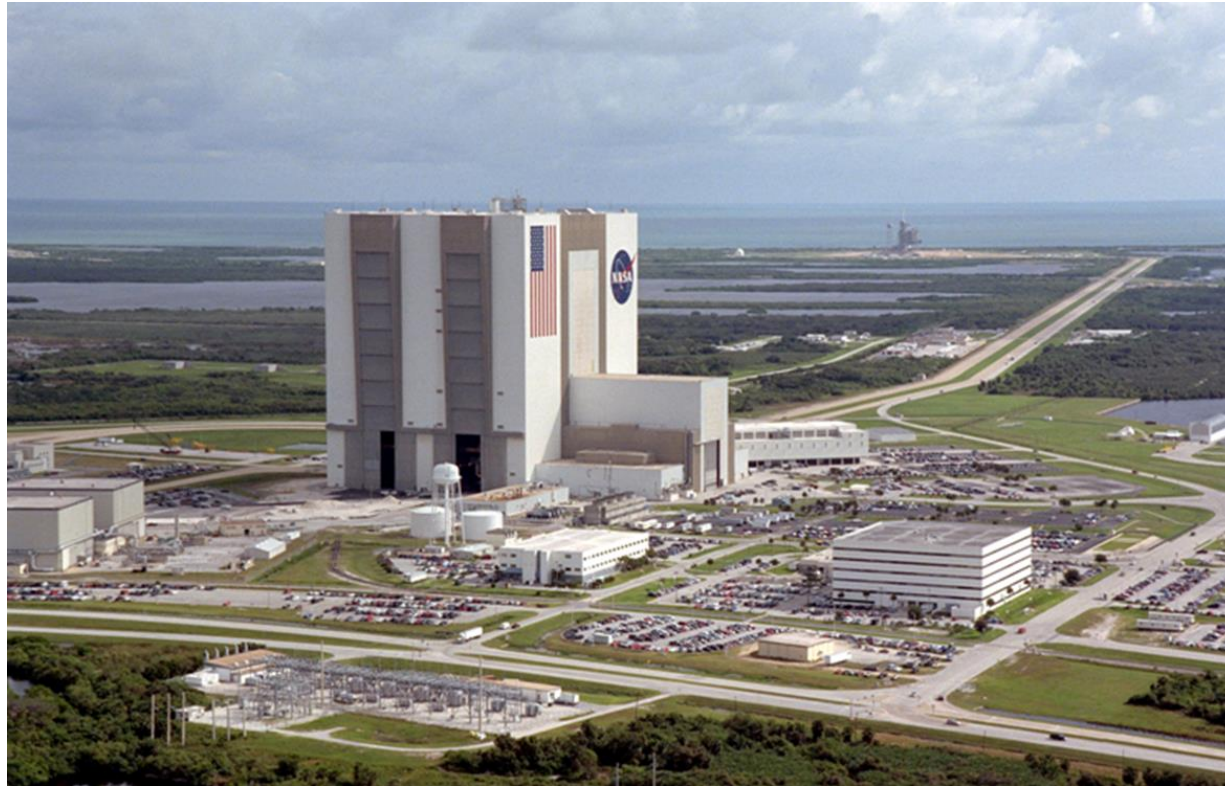

Positioned within 1,000 ft (305 m) of the Atlantic Ocean, KSC's launch facilities are exposed to salty air that blows from the ocean, high ambient air temperatures, and an extensive amount of UV Light. The high temperature of the engine exhaust is up to nearly 5,000 F (2,760 °C). Close to 70 tons of hydrochloric acid (HCl) are generated by the combustion products of a rocket's solid propellant.

In 1981 the Space Shuttle introduced acidic deposition products

SRB Exhaust

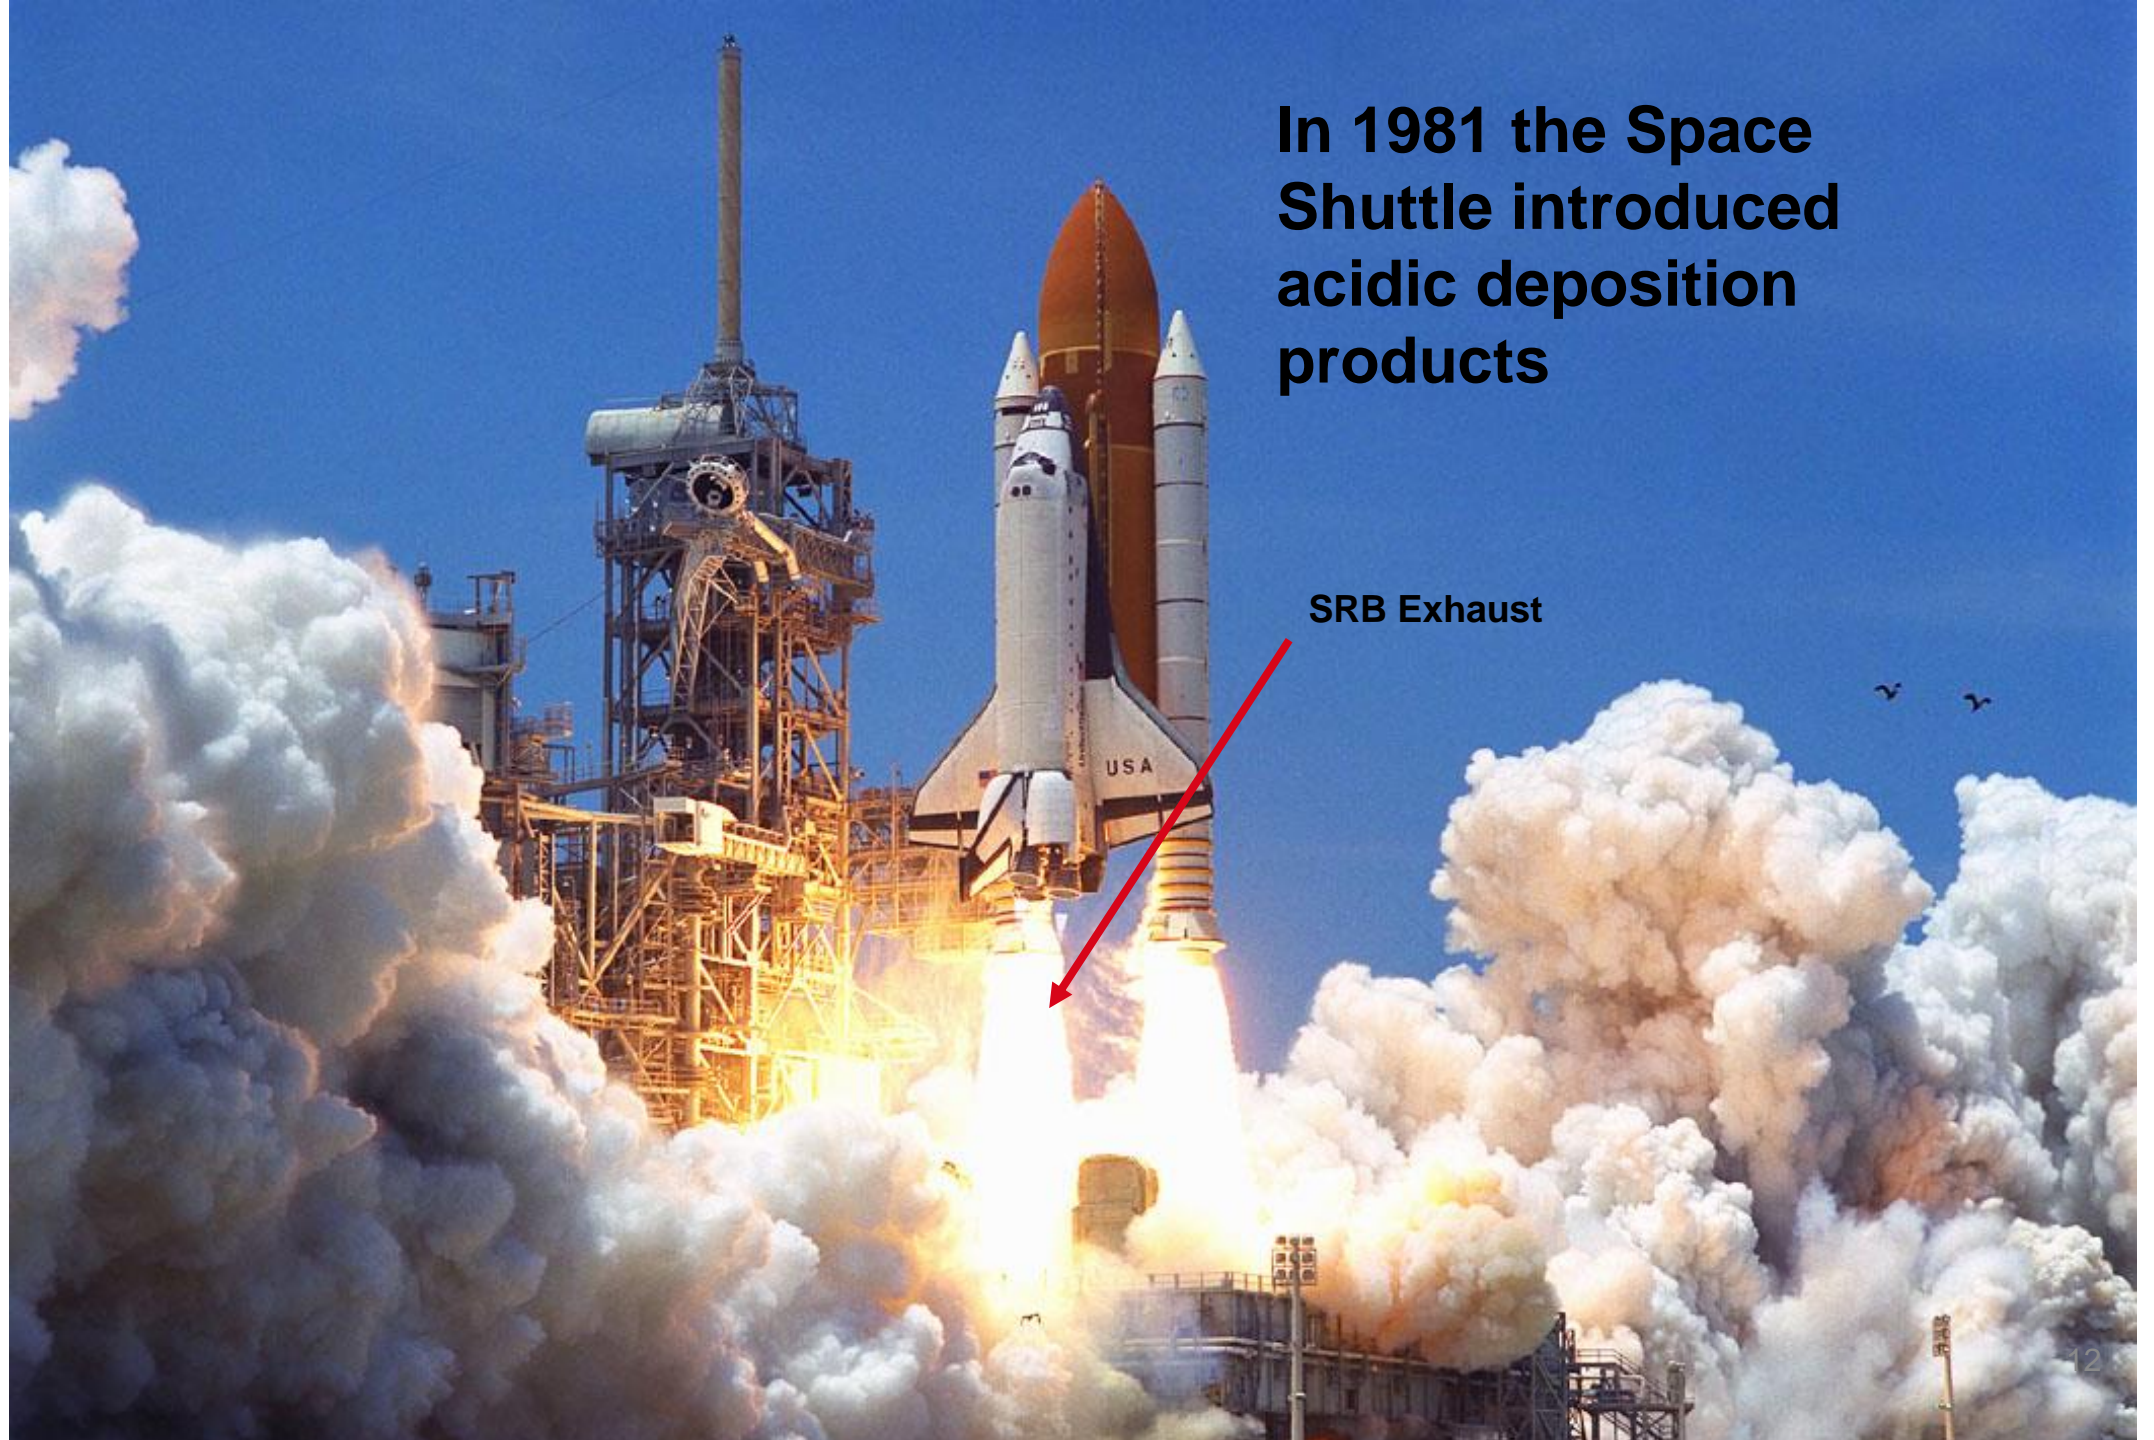

Natural Salt Fog Chamber







Corrosion Rates of Carbon Steel

Corrosion rates of carbon steel calibrating specimens at various locations*			
Location	Type Of Environment	Corrosion Rate ^a μm/yr	Corrosion Rate ^a mils/yr
Esquimalt, Vancouver Island, BC, Canada	Rural marine	13	0.5
Pittsburgh, PA	Industrial	30	1.2
Cleveland, OH	Industrial	38	1.5
Limon Bay, Panama, CZ	Tropical marine	61	2.4
East Chicago, IL	Industrial	84	3.3
Brazos River, TX	Industrial marine	94	3.7
Daytona Beach, FL	Marine	295	11.6
Pont Reyes, CA	Marine	500	19.7
Kure Beach, NC (80 ft. from ocean)	Marine	533	21.0
Galeta Point Beach, Panama CZ	Marine	686	27.0
Kennedy Space Center, FL (beach)	Marine	1070	42.0
^a Two-year average * Data extracted from: S. Coburn, Atmospheric Corrosion, in Metals Handbook, 9th ed, Vol. 1, Properties and Selection, Carbon Steels, American Society for Metals, Metals Park, Ohio, 1978, p.720			

A mil = one thousandth of an inch = 0.0254 mm

Changes In Corrosion Rate with Distance from the Ocean

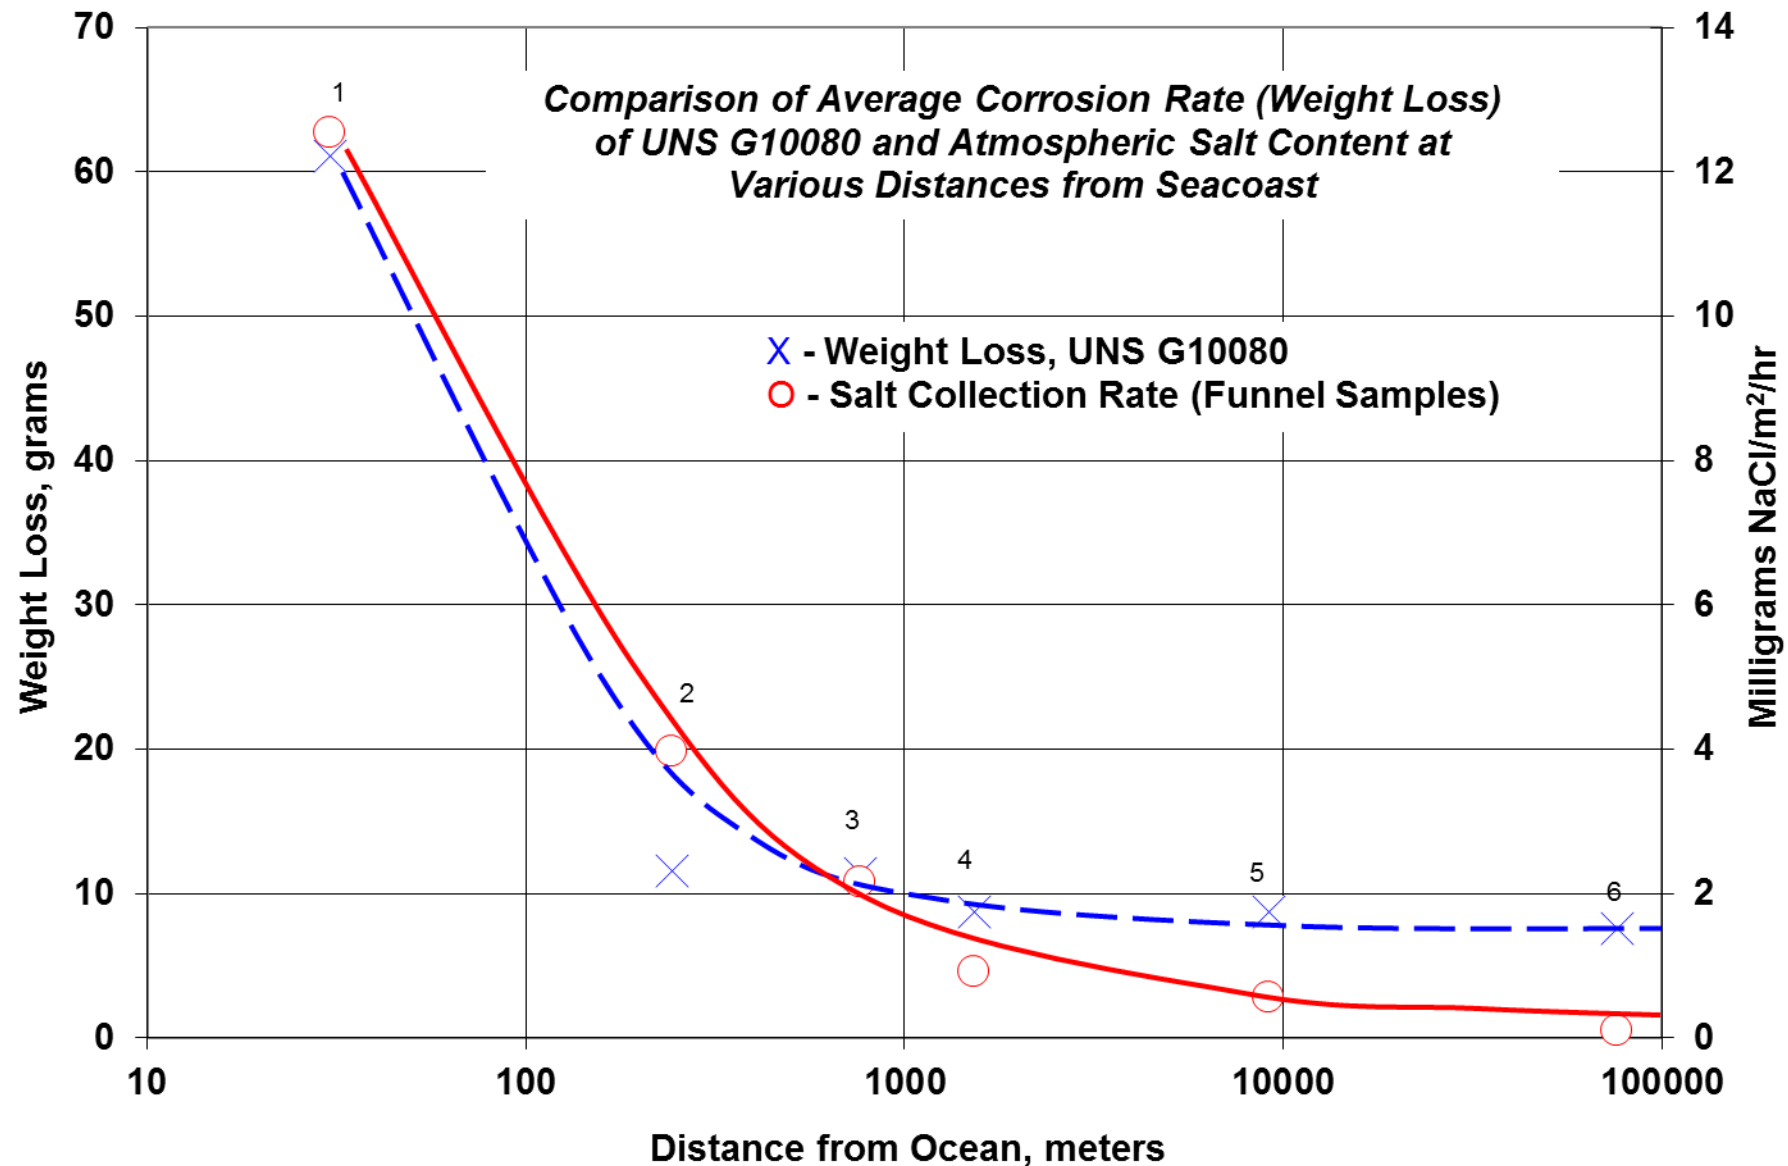

Examples of Launch Pad Corrosion



Enclosed / Inaccessible Areas



Dissimilar Metals




**KSC Launch tower structural
steel corrosion**



Hidden corrosion

Corrosion Evaluation Studies at KSC

- Corrosion evaluation studies began at KSC in 1966 during the Gemini/Apollo Programs.
- The KSC Beachside Corrosion Test Site was established at that time to conduct controlled corrosion studies for protective coatings.

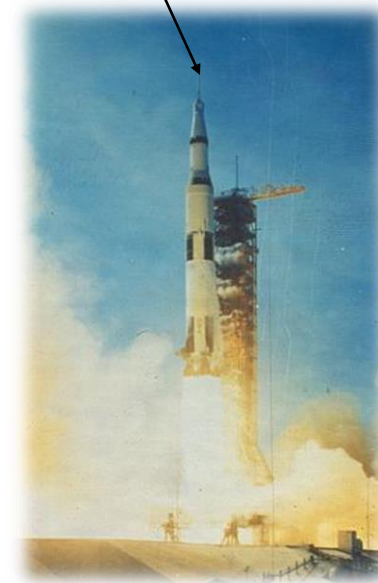

Saturn V



Qualifying Coatings for NASA Launch Facilities

- Over the years, the Corrosion Technology Laboratory has developed proven methodologies to evaluate and test materials and coatings for use in NASA's unique corrosive environments
- Based upon this knowledge, experience and expertise, NASA-STD-5008B, "Protective Coating of Carbon Steel, Stainless Steel, and Aluminum on Launch Structures, Facilities, and Ground Support Equipment" was developed to test and evaluate protective coatings to control corrosion of these assets.

NASA-STD-5008B


- In order for a coating system to be used at NASA it must be listed on the NASA-STD-5008B Approved Products List. Coating systems on this list are qualified according to the requirements of NASA-STD-5008B by the Corrosion Technology Laboratory.
- Typical protocol requires laboratory adhesion tests, color measurements, gloss measurements, and corrosion evaluations on the coatings exposed at the NASA KSC Beachside Corrosion Test Site



Launch complex 39 zones of exposure


Atmospheric Exposure

Real world
exposure at a site
that mimics
actual
performance
requirements

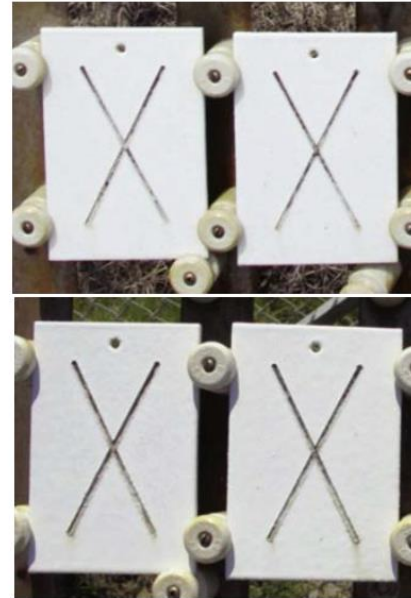

Coating samples at 18 months (top) and 60 months (bottom) of exposure. This coating was approved for use.

NASA Technical Standard for Protective Coatings (NASA-STD-5008B) requires 18 months of good performance for preliminary approval and continued good performance for 5 years for final approval of a coating system.

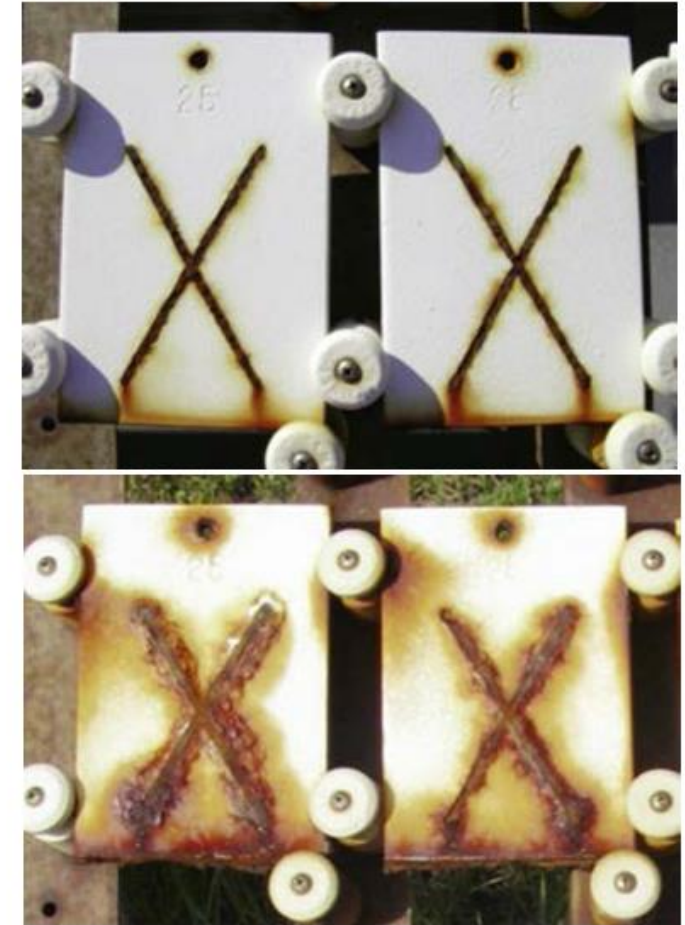

Coating samples at 18 months (top) and 60 months (bottom) of exposure. This coating was not approved for use

KSC Beachside Corrosion Test Site



NASA's Corrosion Technology Laboratory



The Corrosion Technology Laboratory at NASA's Kennedy Space Center provides technical innovations and engineering services in all areas of corrosion/materials degradation for NASA and external customers.

Capabilities

- Beachside Atmospheric Exposure
- Full Seawater Immersion Exposure
- Tidal Exposure
- Seawater Spray/Splash (Splash Zone) Exposure
- Corrosion Engineering Services
- Accelerated Corrosion Testing
- Concrete Testing
- Cathodic Protection
- Coating Development
- Electrochemistry
- Surface Analysis
- Coating Application and Evaluation
- Website: <http://corrosion.ksc.nasa.gov/>



Beachside Corrosion Test Site



Seawater Spray/Splash Exposure
(Simulated Shipboard Testing)



Accelerated testing




Electrochemical testing

Computerized Corrosion Management*

Since 2000, a computerized corrosion management program has been used to keep track of corrosion in more than 3,600 critical components and about 1 million m² of surface area.

- Launch complex components
 - Launch towers and structures
 - Sound suppression water systems
 - Cryogenic fuel tanks and associated piping
 - Access towers
 - High-pressure gas tanks
 - Camera towers
 - Lighting protection
 - Mobile launch platforms
- Metallic structures outside launch area

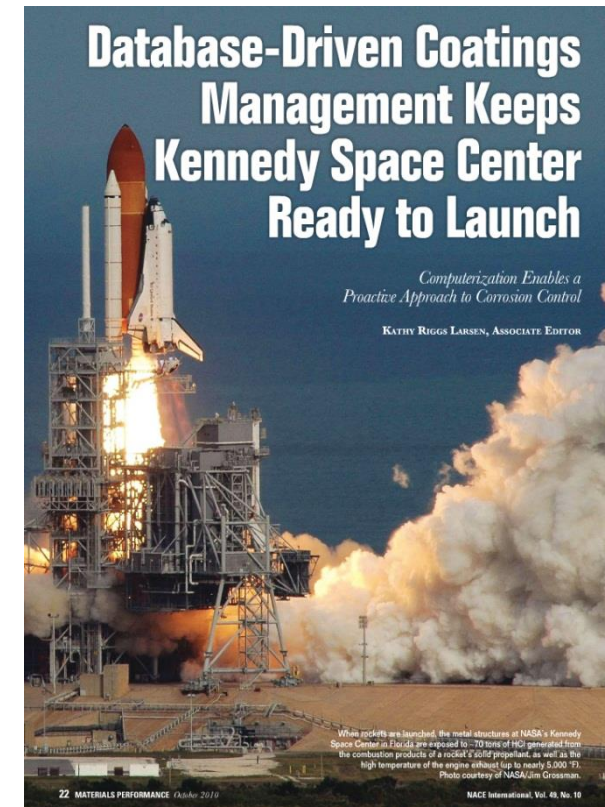

Computerized Corrosion Management

Component Manager

Component Data | Environment | Attributes and Multipliers | Coating System and Color

Asset Group

PROGRAM: Launch Complex 39A ... **FACILITY:** Fixed Service Structure ... **ITEM:** 095 Level ...

Component Data

NAME: Structural Steel - Area 1 **Dwg. Sections:**

TYPE: Structure Support **Custom1:**

SUBSTRATE: Carbon Steel **Custom2:**

SURF. AREA: 2822.0 **Custom3:**

Stripe Length (ft): .0 **Width (ft):** .0 **Custom4:**

CRITICALITY: Level 2 **Custom5:**

View: Visible **Custom6:**

Location: **Finish:**

Input Date: 07/19/2000

Notes:

Handrails - Area 3
Hose Reel Box
Mixed Components - Area 2
Mixed components - Area 3
Piping - Area 1
Piping - Area 2
Piping - Area 3
Stair Tread - Area 2
Structural Steel - Area 1
Structural steel - Area 2
Structural steel - Area 3

Picture **Video** **Sound**

Delete Record

OK **Cancel** **Apply**

Information stored in the database includes the location of the structure, the type of structure, the surface area of the structure, the substrate material, and the current condition of the coating system. Photos visually document condition ratings



Environmentally Driven Projects


NASA has been facing environmentally driven challenges in corrosion control since the inception of the Space Program.

Many projects throughout the years have been aimed at finding alternate coatings to replace high VOC and hexavalent chromium coatings for launch pad structures and ground support equipment.

Current environmentally driven projects include:

- Alternative to Nitric Acid Passivation
- Hexavalent Chrome alternative Coatings Systems
- Environmentally Friendly Corrosion Protective Compounds (CPCs)
- Smart and Multifunctional Corrosion Protective Coating Development
- Improved Accelerated Corrosion Testing Development

Alternative to Nitric Acid Passivation



Expected Results

Provide the data necessary to verify that citric acid can be used as an environmentally preferable alternative to nitric acid for passivation of stainless steel

Benefits of Citric Acid

- Citric acid does not remove nickel, chromium, and other heavy metals from alloy surfaces
- Reduced risk associated with worker health and safety
- Reduced hazardous waste generation resulting in reduced waste disposal costs
- Reduced Nitrogen Oxide (NO_x) emissions that are a greenhouse gas, contribute to acid rain and smog, and increased nitrogen loading (oxygen depletion) in bodies of water



Image: Master isolated images /
FreeDigitalPhotos.net

Environmentally Friendly Corrosion Protective Coatings and Corrosion Preventative Compounds (CPCs)

- Progressively stricter environmental regulations are driving the coating industry to abolish many corrosion protective coatings and corrosion preventative compounds (CPCs) that are not environmentally friendly.
- The objective of this project is to identify, test, and develop qualification criteria for environmentally friendly corrosion protective coatings and corrosion preventative compounds (CPCs) for flight hardware and ground support equipment .



**Dead tree/fish label warnings
required in Europe for zinc primers**


**Harmful to aquatic organisms, may
cause long-term adverse effects in
the aquatic environment. (Europe
MSDS))**

Keep out of waterways. (US MSDS)

Smart Coatings for Corrosion Control

- The use of "smart coatings" for corrosion sensing and control relies on the changes that occur when a material degrades as a result of its interaction with a corrosive environment.
- Such transformations can be used for detecting and repairing corrosion damage.
- The Corrosion Technology Laboratory is developing a coating that can detect and repair corrosion at an early stage.
- This coating is being developed using pH sensitive microcontainers that deliver their contents when corrosion starts to:


- Detect and indicate the corrosion location
- Deliver environmentally friendly corrosion inhibitors
- Deliver healing agents to repair mechanical coating damage.

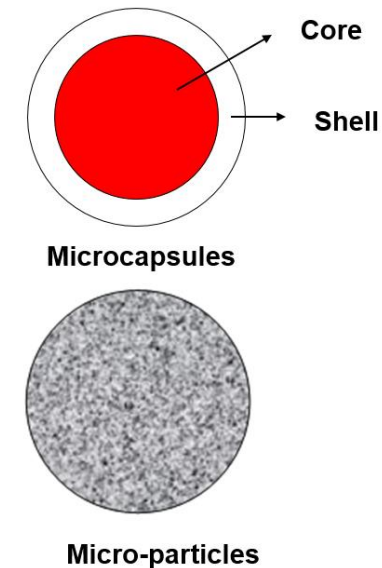


Feedback-Active Micro-containers for Corrosion Detection and Control




- Containers with an active ingredient-rich core and stimuli-responsive shell (microcapsules)
- Containers with an active ingredient incorporated into a stimuli-responsive matrix (micro-particles). Matrix can be organic (pH sensitive polymer) or inorganic (porous silica)

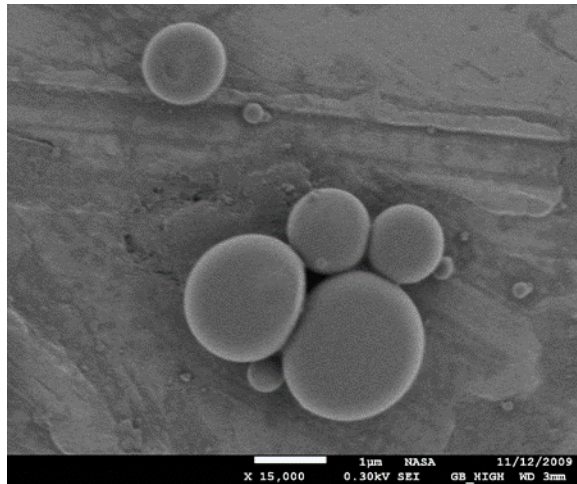

pH-sensitive microcapsules

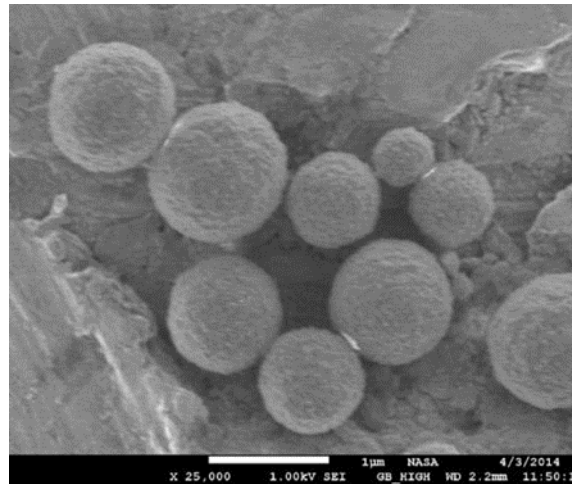


pH-sensitive micro-particles

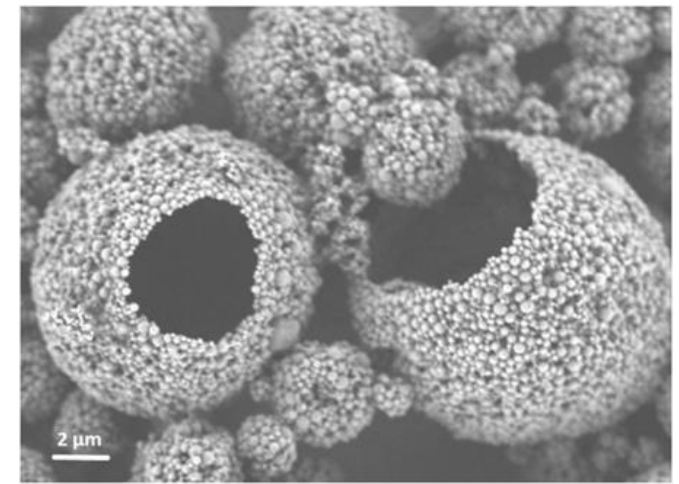


Inorganic micro-containers

pH-triggered Release Microcapsules

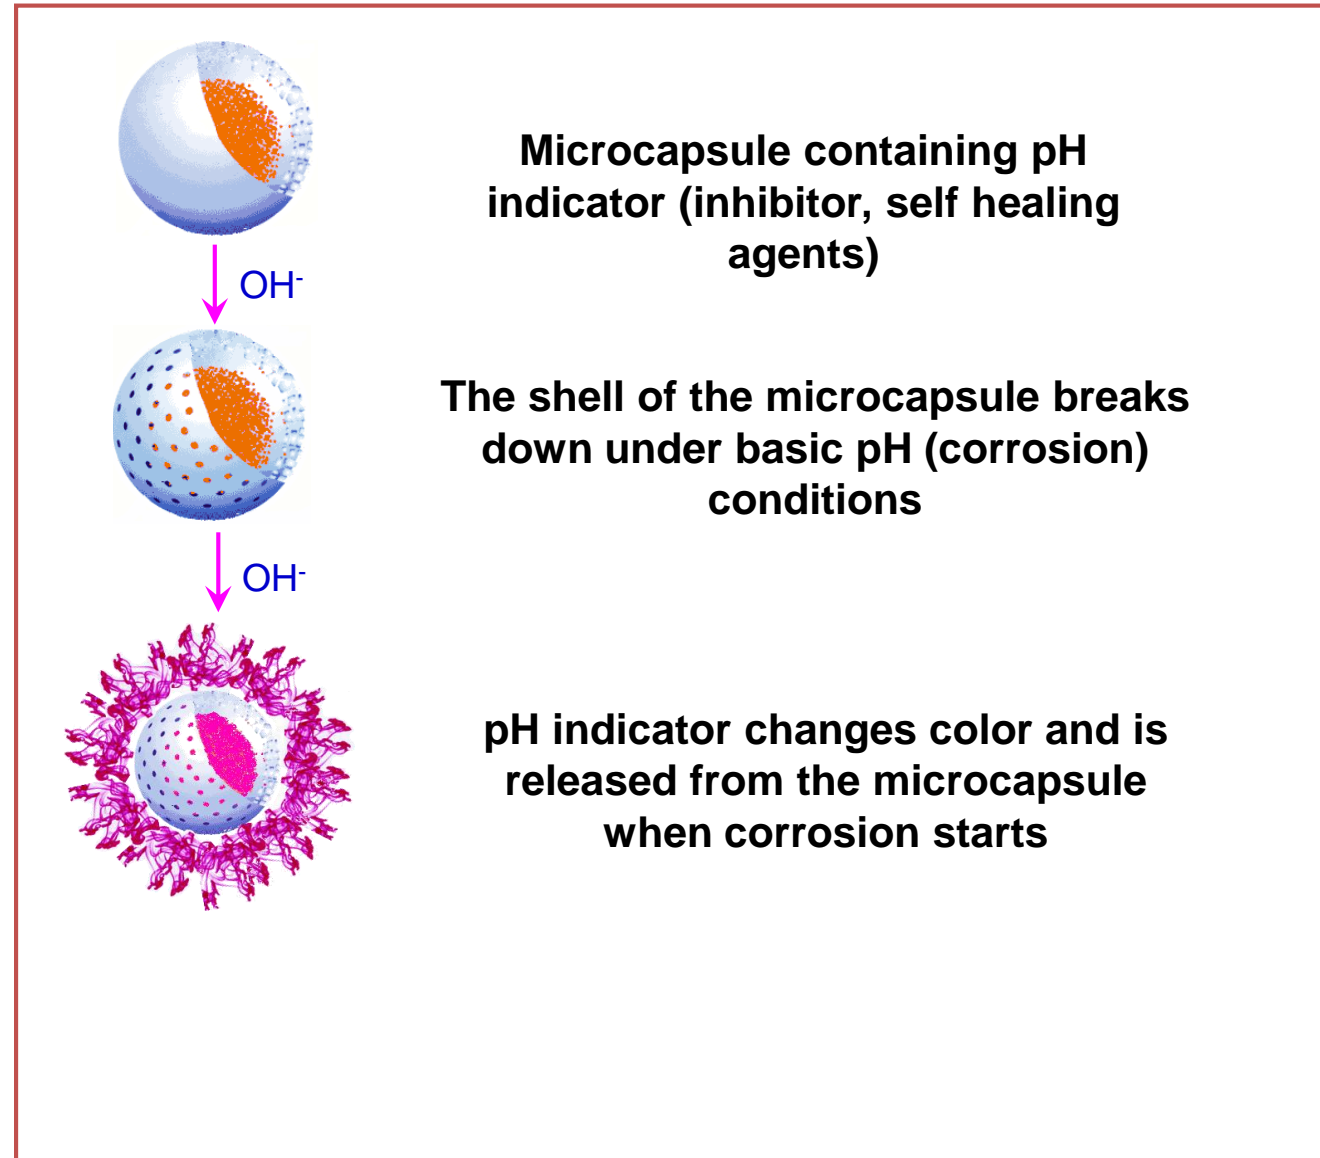


Smart Coating Response to Corrosion and Mechanical Damage

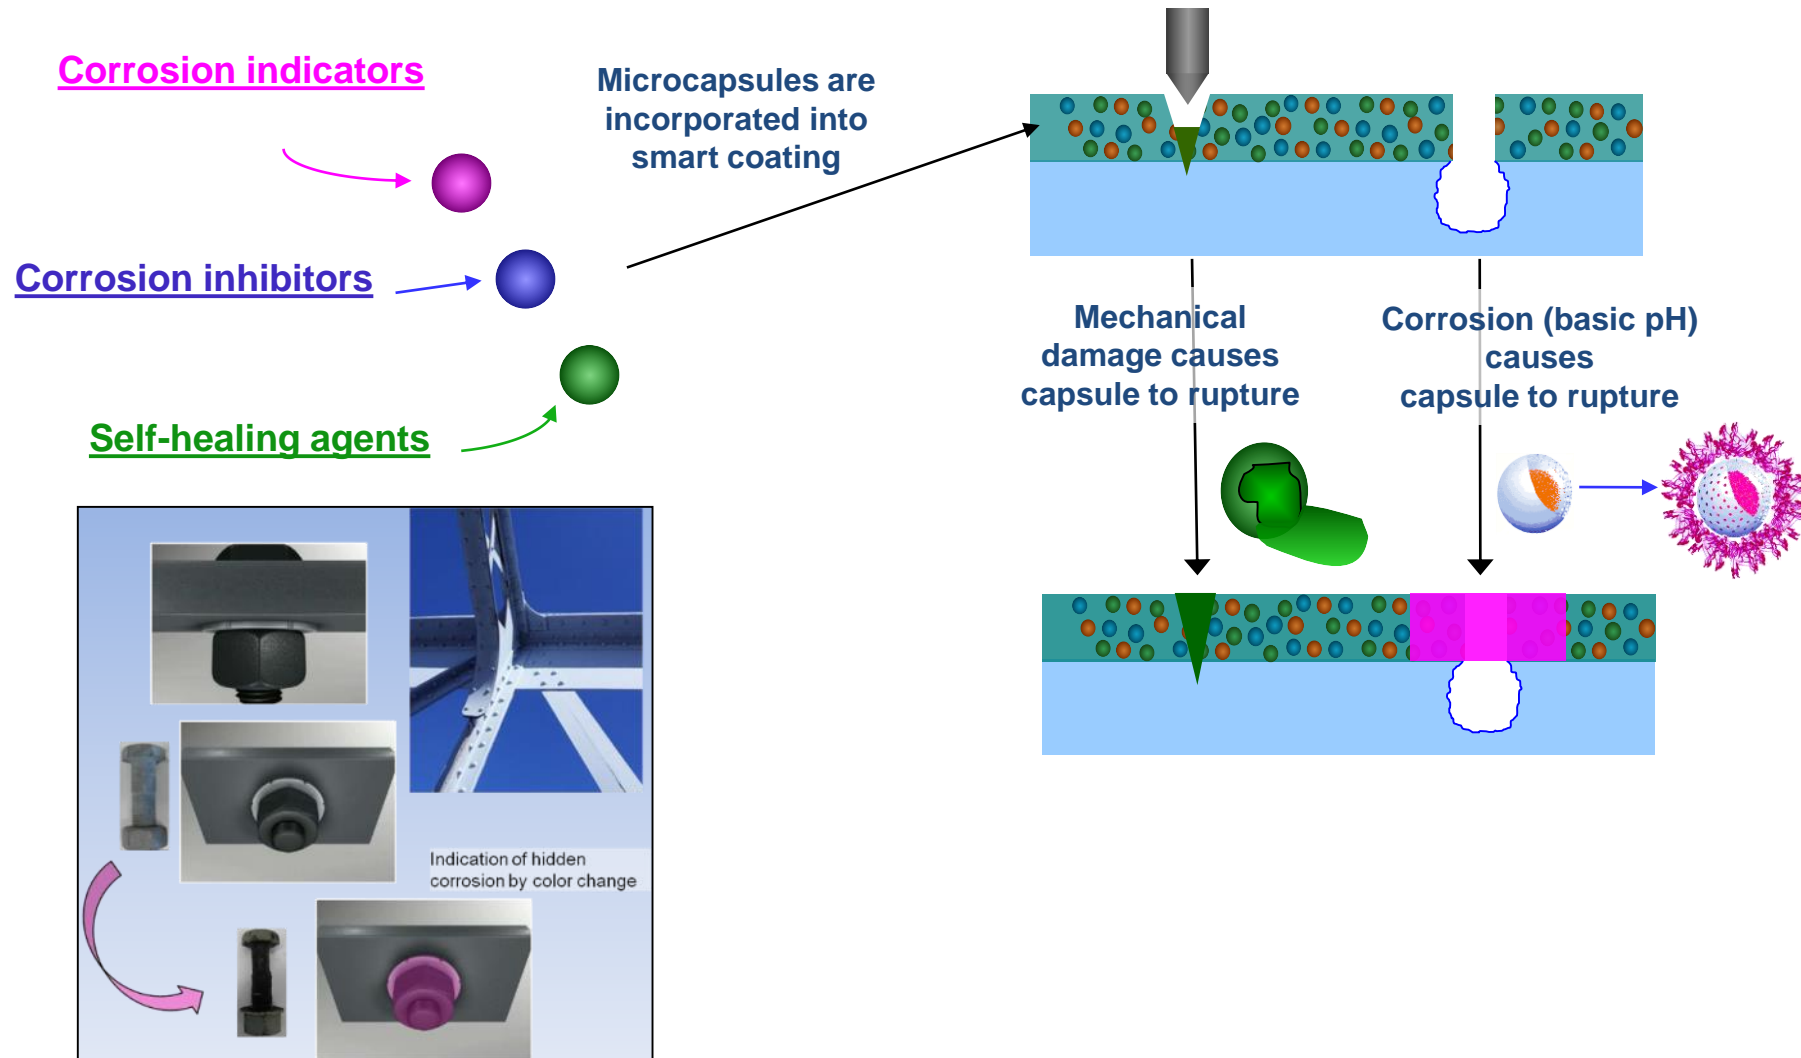





Improved Accelerated Corrosion Testing

- Long-term prediction of corrosion performance from accelerated tests.


1010 steel (UNS 10100)
panels after prolonged
exposure



Correlation?

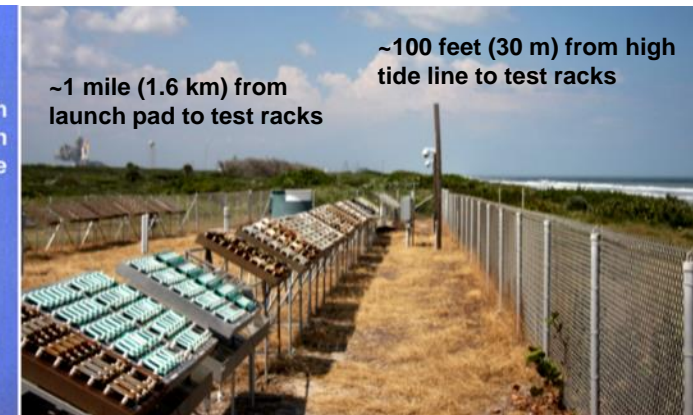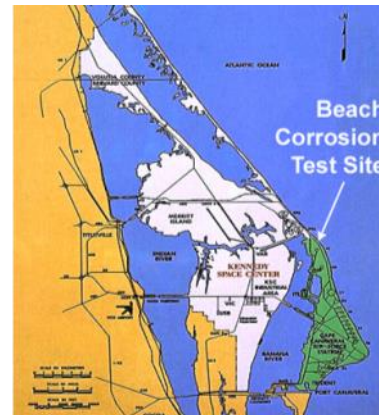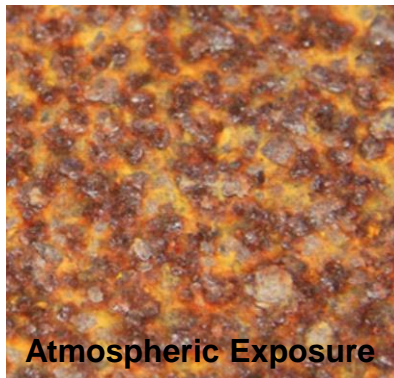

Timescale Correlation between Marine Atmospheric Exposure and Accelerated Corrosion Testing

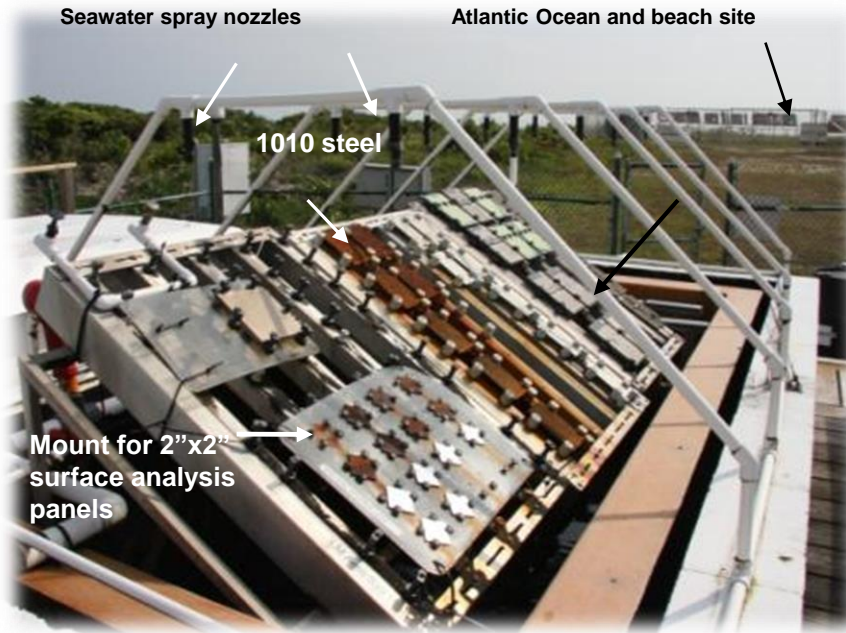


Alternating Seawater Spray System with exposure panels and modification for panels used for surface analysis (left). Wet candles exposed to KSC beachside atmospheric conditions and used to measure chloride concentration per month (right).



Summary

- NASA has been dealing with corrosion problems since the inception of the Space Program.
- Acidic exhaust from SRBs exacerbate natural corrosive conditions at the launch pads.
- NASA's Corrosion Technology Laboratory has been actively engaged in anticipating, managing, and preventing corrosion of launch and ground support equipment.
- NASA is engaged in projects aimed at identifying more environmentally friendly corrosion protection coatings and technologies.
- Current technology development efforts target the development of smart coatings for corrosion detection and control, the development of a new accelerated corrosion test method that correlates with long-term corrosion test methods, and the development of an environmentally friendly metal passivation method.
- Website: <http://corrosion.ksc.nasa.gov/>

NASA's Corrosion Technology Laboratory



B.P. Pearman, M.R. Kolody, M.N. Johnsey, J.W. Buhrow, L. Fitzpatrick, J. Zhang, L.M. Calle, T.A. Back, S.T. Jolley, E.L. Montgomery, J.P. Curran, and W. Li